


Features:

- Broad band, low noise, and high gain
- Low VSWR, unconditional stable
- Small size, low cost
- SMA female connector I/O
- Operating temperature -10~+50°C, storage temperature -55~+85°C

Electrical Specifications

Frequency Range	10 MHz to 1200 MHz
Noise Figure	2.5dB Max
P-1dB Compression Point	+10dBm Typical
Nominal Gain	35 dB @25°C
Gain flatness	+/-1.0 dB
Gain Variation	+/-1.0dB
Input VSWR	1.5:1 max
Output VSWR	1.5:1 max
Spurious	-60 dBc max
Operating Temperature	-10 to +50°C
Survival Temperature	-55 to +85°C
DC Power Supply	+90 mA@+12~+15 V
In/Out connectors	SMA female
Size	1.5"x0.85"x0.375

Mechanical Structure:

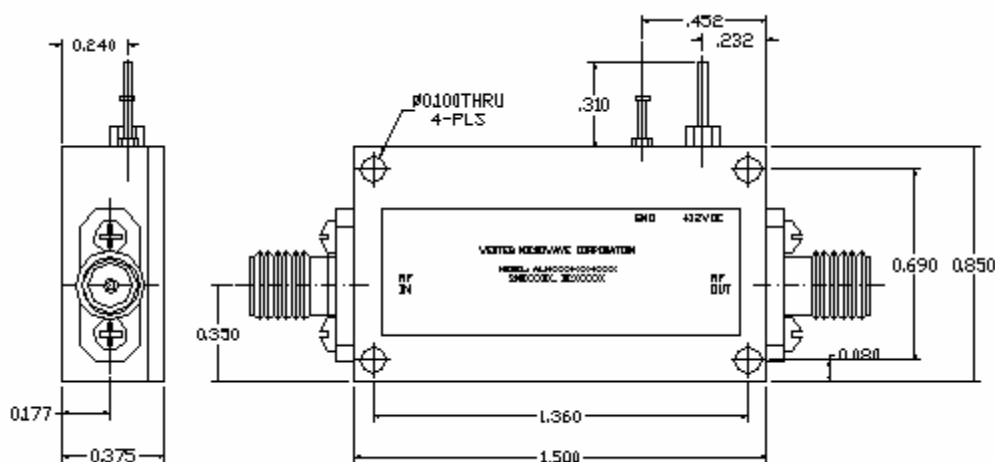

Note: All units in inches.