


Features:

- Broad band, low noise, and high gain
- Low VSWR, unconditional stable
- Small size, low cost
- SMA female connector I/O
- Operating temperature -40~+85°C, storage temperature -55~+85°C

Electrical Specifications

Frequency Range	2000MHz to 4000 MHz
Noise Figure	1.3dB typical, 1.5dB Max @ 25°C
Nominal Gain	40 dB @25°C
Gain flatness	+/-1.5 dB
Gain Variation	+/-1.5dB typical
P-1dB Compression Point	+10dBm typical
Output IP3	+22dBm typical
Input VSWR	2.0:1 max
Output VSWR	2.0:1 max
Spurious	-60 dBc max
Operating Temperature	-40 to +75°C
Survival Temperature	-55 to +85°C
DC Power Supply	90mA@+9~12V
In/Out connectors	50 ohm SMA female
Size	1.5"x0.85"x0.375

Mechanical Structure:

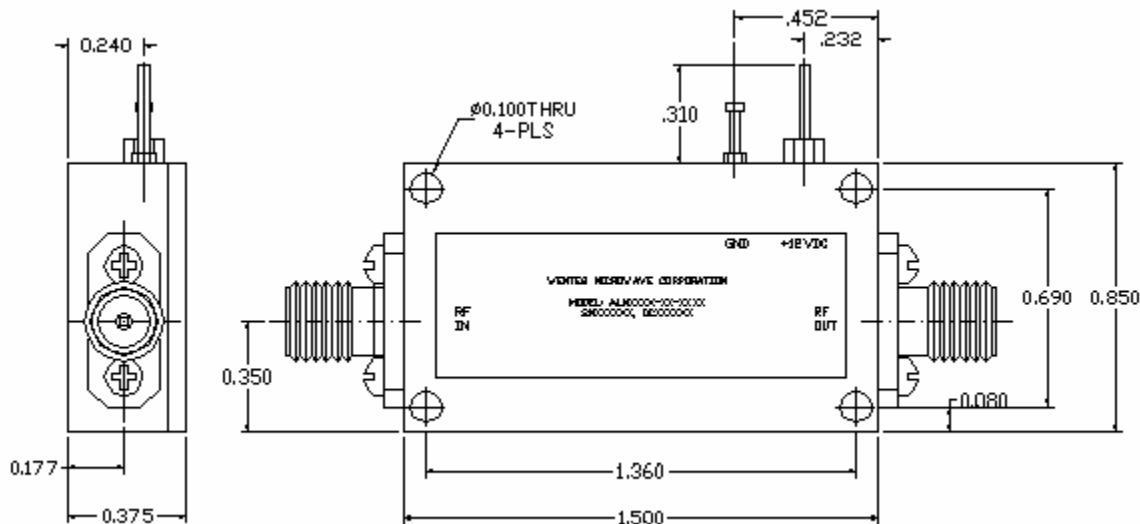

Note: All units in inches.